

## HEADQUARTERS

FAAC spa  
Via Calari 10 40069 Zola Predosa (BO)  
Tel. +39 051 61724 - Fax +39 051 758518  
info@faac.it - www.faacgroup.com

## FAAC SUBSIDIARIES

FAAC AG  
Tel. +41 52 3461721  
Fax +41 52 3461723  
Illnau, Switzerland  
www.faac.ch

FAAC FRANCE  
Tel. +33 472218700  
Fax +33 472218701  
Corbas, France  
www.faac.fr

FAAC GMBH  
Tel. +49 8654 49810  
Fax +49 8654 498125  
Freilassing, Germany  
www.faac.de

FAAC MIDDLE EAST  
Dubai, Emirati Arabi  
www.faac.ae  
info@faac.ae

F.A.A.C. SA  
Tel. +34 91 6613112  
Fax +34 91 6610050  
Madrid, España  
www.faac.es

FAAC UK LTD.  
Tel. +44 1256 318100  
Fax +44 1256 318101  
Basingstoke Hampshire, UK  
www.faac.co.uk

FAAC AUSTRALIA PTY LTD  
Tel. +61 2 7565644  
Fax +61 2 87565677  
Homebush – Sydney, Australia  
www.faac.com.au

FAAC NORD  
Tel. +33 1 69191620  
Fax +33 1 69536069  
Massy, France  
www.faac.fr

FAAC INDIA PVT. LTD  
Tel. +91 120 3934100/4199  
Fax +91 120 4212132  
Noida – Delhi, India  
www.faacindia.com

FAAC POLSKA SP.ZO.O.  
Tel. +48 22 8141125  
Fax +48 22 8142024  
Warszawa, Polska  
www.faac.pl

F.A.A.C. SA Delegación Cataluña  
Tel. +34 93 4362000  
Fax +34 93 5727994/4368225  
Barcelona, España  
www.faac.es

FAAC BENELUX  
Tel. +32 50 320202  
Fax +32 50 32024215  
Brugge, Belgium  
www.faac.be


FAAC G.E.S. M.B.H.  
Tel. +43 662 8533950  
Fax +43 662 85339520  
Wals – Siezenheim, Austria  
www.faac.at

FAAC INTERNATIONAL INC.  
Tel. +1 307 6351991  
Fax +1 307 6328148  
Cheyenne, USA  
www.faacusa.com

FAAC SCANDINAVIA AB  
Tel. +46 36 376860  
Fax +46 36 370780  
Bankeryd, Sweden  
www.faac.se

FAAC SHANGHAI  
Tel. +86 21 68182970  
Fax +86 21 68182968  
Shanghai, China  
www.faac.com.cn

908475004 - Rev. 10 - 3.000 - Zucchini - 01/2009 The descriptions and illustrations contained in the present brochure are not binding. FAAC reserve the right to undertake product technical modifications without prior notice.

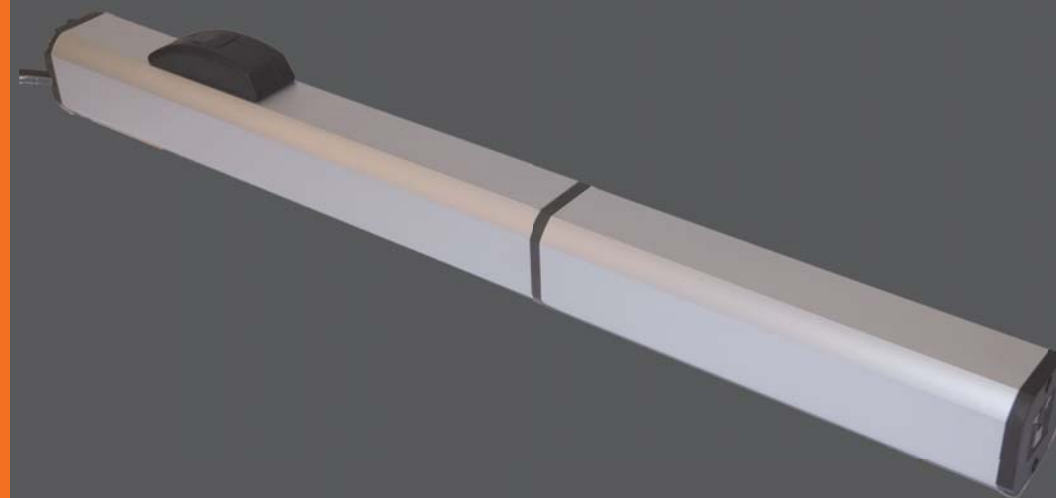

## 400 Hydraulic operator for swing-leaf gates

# FAAC




THE 400 RANGE OFFERS 8 DIFFERENT TYPES OF OPERATORS DESIGNED TO SWING GATES UP TO 7 METRES IN LENGTH.

- Some models include hydraulic systems to ensure that the gates are kept in a closed position.
- The exclusive hydraulic device ensures maximum anti-crushing protection.
- The control boards provide a slowdown feature at the end of the opening and closing cycles to lower noise, impact forces and prolong the life of the gate system.




400 positive stop



452 MPS control board



455D control board

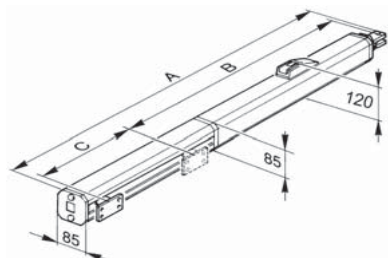

Dimensions of the unit.

		operator type	
		Std	Long
A	overall dimensions	1031	1285
B	Distance between attachments	700	820
C	Effective stroke	260	380

Detachable lead



### TECHNICAL SPECIFICATIONS 400

	400 CBC	400 CBA	400 CBAC	400 SB	400 SBS	400 CBACR	400 CBAC LN	400 SB LN
Power supply:	230 Vac (+6% - 10%) 50(60) Hz							
Electric motor:	220 W							
Absorbed current:	1A							
Motor rotation speed:	1400 RPM							
Rod extension speed:	1 cm/s				0.75 cm/s		1.5 cm/s	
Pump flow rate:	1l/min				0.75 l/min		1.5l/min	
Traction and thrust force:	620 DaN				775 daN		465 daN	
Operating ambient temp:	120°C							
Protection class:	IP55							
Weight:	8.6kg						10kg	
Oil type:	FAAC HP Oil							
Single leaf max length (m)	2.2	2.2	2.2	4	7	2.2	2.2	2.5
Use frequency (cycles/hr)	48	48	48	48	36	72	49	49